

KS(Spin Casting Zinc Alloy)

Technical Datasheet

Uses

This alloy is ideal for the production of strong decorative components by spin casting.

Characteristics

Chemical composition Guaranteed analysis (in %)	KS ZnAl4Cu3Mg0.5
Al	3.9 - 4.3
Cu	2.7 - 3.3
Mg	0.4 - 0.6
Pb	≤ 0.003
Fe	≤ 0.020
Cd	≤ 0.003
Sn	≤ 0.001
Ni	--
Physical data	KS
Density (kg/dm ³ at 20 °C)	6.8
Solidification range (°C)	379-390
Shrinkage in ‰	4 – 5
Lin. thermal expansion (coef./°C)	27.8 x 10 ⁻⁶
Electrical conductivity (%IACS)	25
Standard	KS
ASTM B952-14	Alloy SC-B / Z35551

Package


Trademark	OVERCOR  ZAMAK
Ingot weight Ingots per bundle Packing/Weight Feet/pallet	8.3 kg 72 + 4 strapped bundles of about 650 kg zinc alloy feet

KS(Spin Casting Zinc Alloy)

Technical Datasheet


Slab (72 slabs per bundle)
Zamak OVERCOR

Nominal mass 8.3 kg
Dimensions 515 x 120 x 40

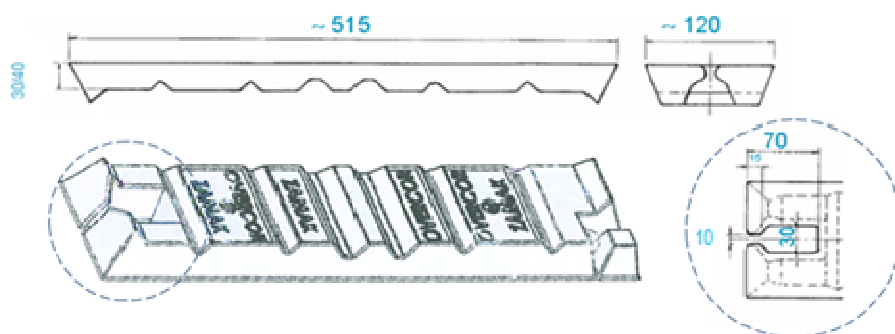


Foot (4 per bundle)
Zamak OVERCOR

Nominal mass 13.6 kg
Dimensions 510 x 110 x 120

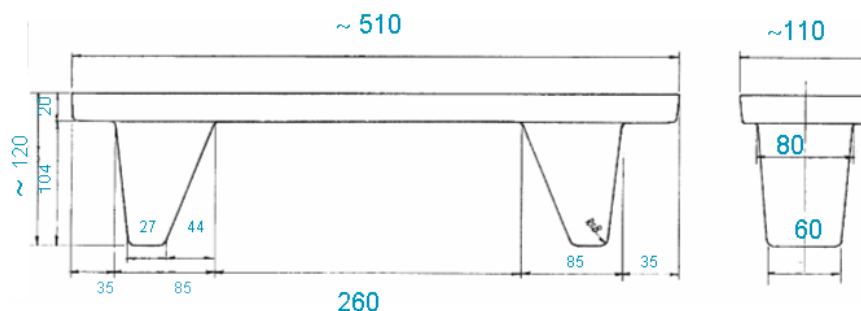

Slab bundle (72 slabs + 4 feet per bundle)
Zamak Overcor


Nominal mass 650 kg
Dimensions 515 x 515 x 620

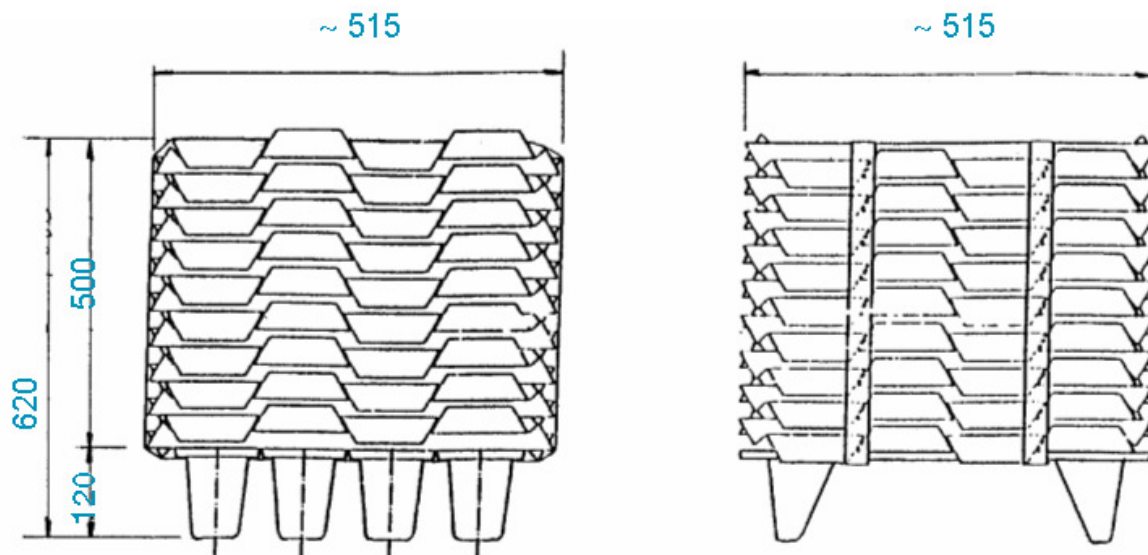

KS(Spin Casting Zinc Alloy)

Technical Datasheet

Label, ingot marking and analysis sample

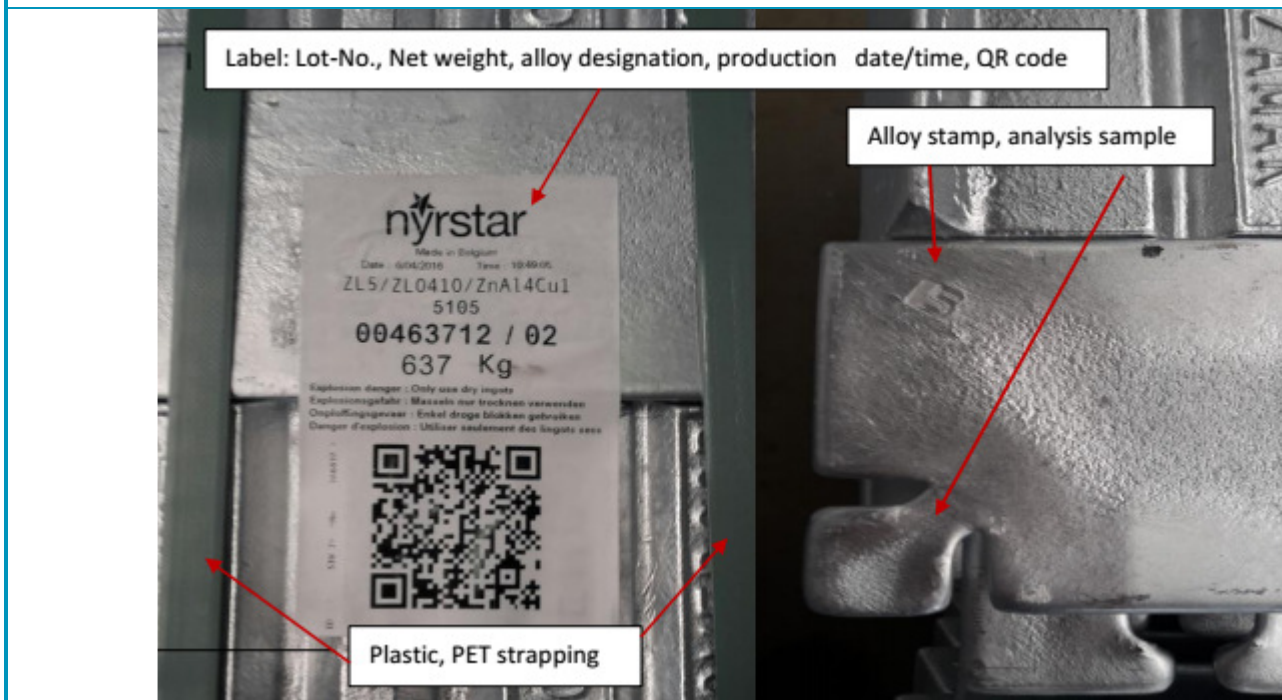

Ingot and bundle reference : Overcor[®]

With plastic cover (on request)

Without plastic cover

